



LEGEND : (Air Conditioning)		
S. No.	SYMBOL	DESCRIPTION
1.		1.5 TR SPLIT AC
2.		1.0 TR SPLIT AC
3.		20 AMP AC POINT

NOTE :-
 1. DONOT SCALE THE DRAWING. FOLLOW WRITTEN DIMENSION ONLY.
 2. ALL DIMENSIONS IN MM. AND FEET BY PARENTS.
 3. 50 MM EDGE PROTECTION TO BE PROVIDED ALL AROUND THE BUILDING.
 4. DRAWING SHALL BE DONE WITH PROPER TOLERANCES.
 5. TOILET FLOOR: FITTED VIBRO-GLASS & BALCONY FLOOR LEVEL: SHALL BE 50 MM. DOWN FROM GENERAL FLOOR LEVEL.
 6. CURBSIDES SHALL HAVE SLOPING OF 80 PPM. MIN.
 7. LOCUS ON SIZES & LEVELS OF FINISHES TO BE CO-ORDINATED WITH EXTERNAL SEWERAGE LAY OUT PLAN FOR APPROVAL BY LOCAL AUTHORITY.
 8. ALL MEASUREMENT MUST BE CHECKED AT SITE BY CONTRACTOR.

REVISIONS	▼	DRAWN BY	DATE
		- AKIT	- 09-06-2018
		SCALE	- NTS
		DRG. NO.	-
		JOB. NO.	- NIPFP/FLAT NO. 8/03
		CHECKED BY	- SAMIR RASTOGI

TITLE
 NIPFP FLAT NO. 8
 (AIR-CONDITIONING LAYOUT)

CLIENT
 NATIONAL INSTITUTE OF PUBLIC
 FINANCE & POLICY

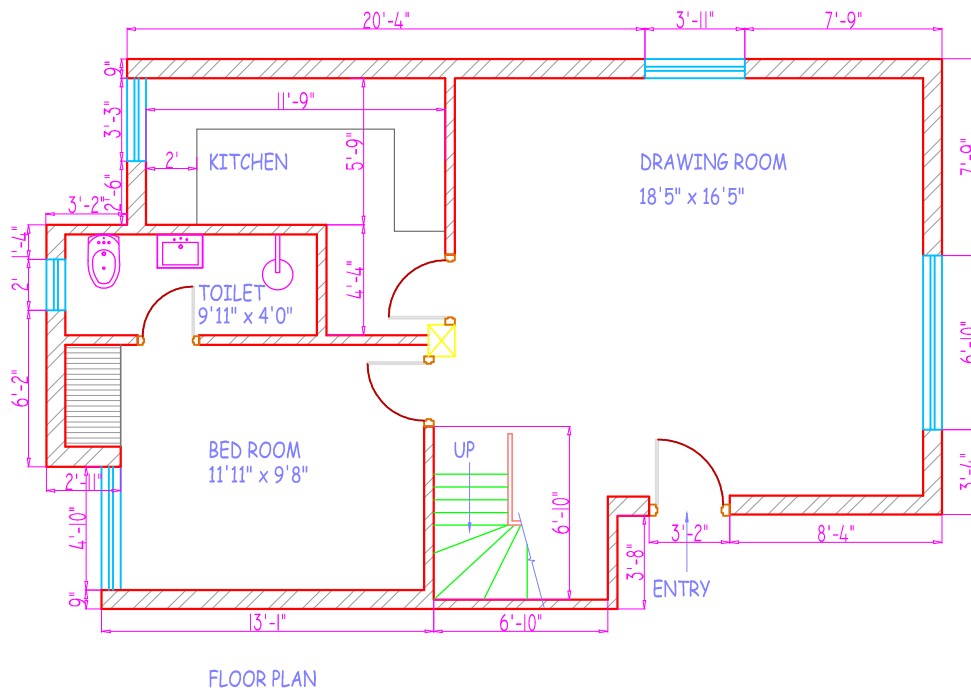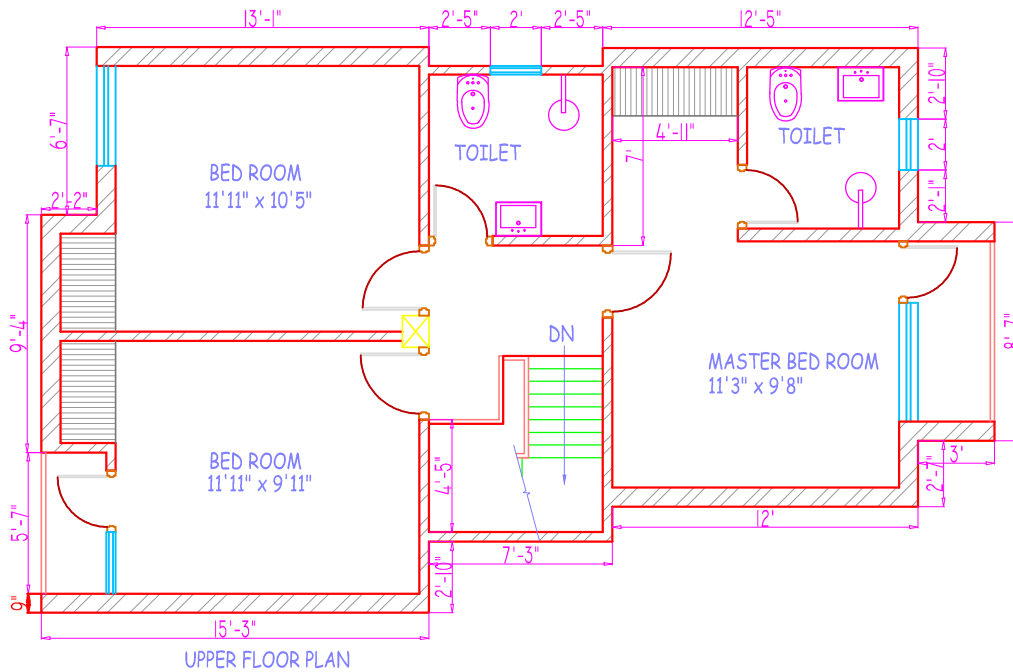

- NOTE**
1. DIMENSIONS SHALL BE AS SHOWN UNLESS OTHERWISE SPECIFIED.
 2. ALL DIMENSIONS IN MM ARE ROUNDED UP.
 3. FIRE ALARM SYSTEM SHALL BE PROVIDED ALL AROUND THE BUILDING.
 4. DRAWING SHALL BE DONE WITH PROPER PROJECTIONS.
 5. TOILET FLOORING SHALL BE 150 MM FROM GENERAL FLOOR LEVEL.
 6. CURBS SHALL HAVE SLOPING OF 1:10.
 7. LOCATION OF SINKS & TUBS SHALL BE CO-ORDINATED WITH EXISTING SEWERAGE LAY OUT PLAN.
 8. ALL MEASUREMENTS MUST BE CHECKED AT SITE BY CONTRACTOR.


REVISIONS	DATE

DRAWN BY	- AKIT
DATE	- 09-01-2018
SCALE	- NTS
DRG. NO.	-
JOB. NO.	- NIPFP/FLAT NO. 8/01
CHECKED BY	- SAMIR RASTOGI


TITLE	NIPFP FLAT NO. 8 (EXISTING FLOOR PLAN)
-------	---

CLIENT	NATIONAL INSTITUTE OF PUBLIC FINANCE & POLICY
--------	--



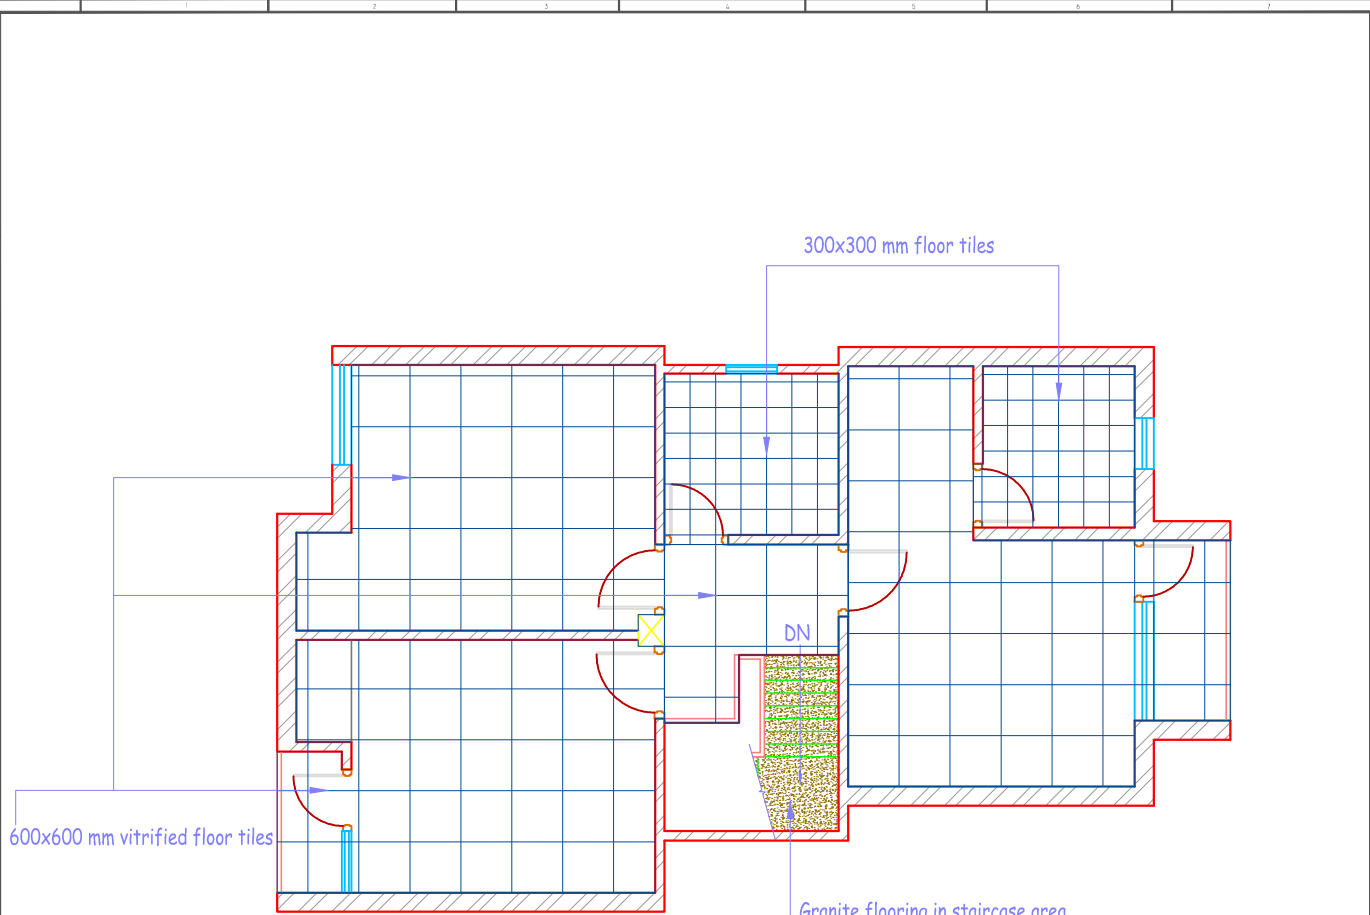

UPPER FLOOR PLAN

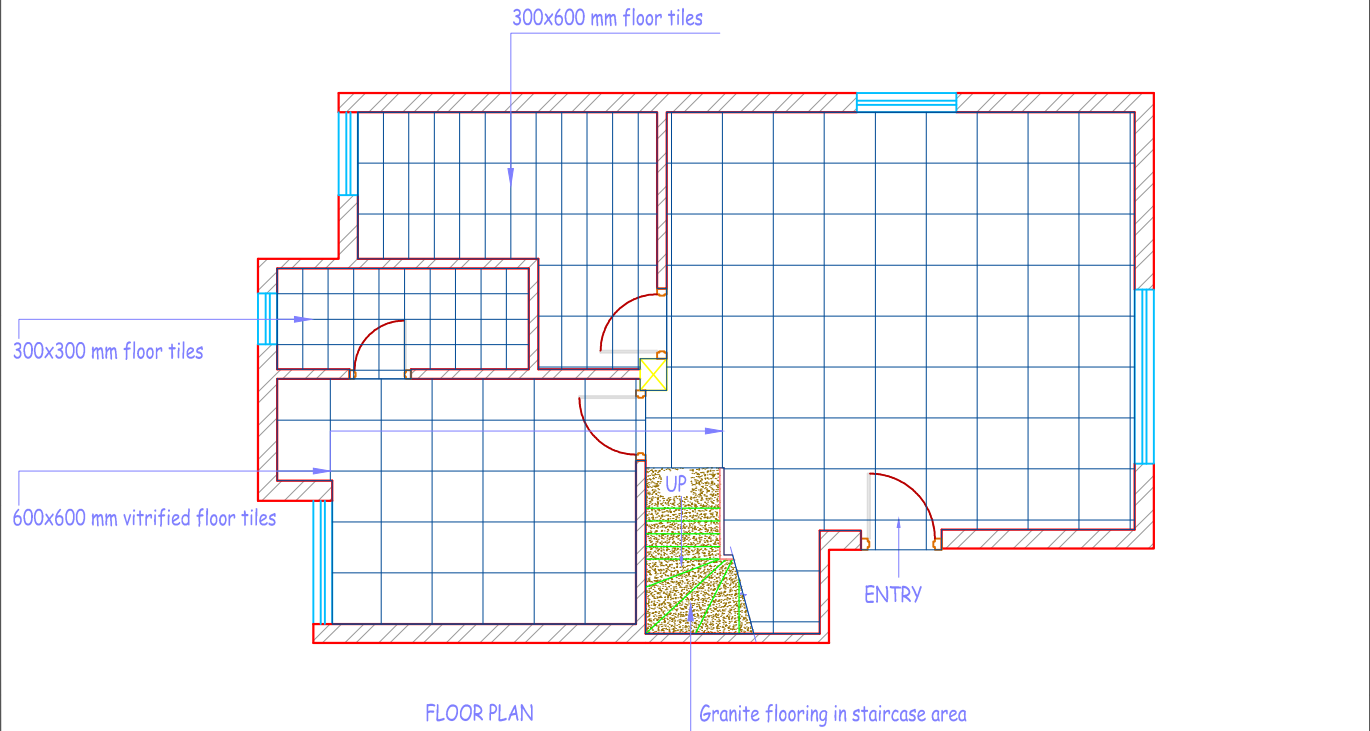

FLOOR PLAN

NOTE:-
 1. DIMENSIONS SHALL BE AS SHOWN UNLESS OTHERWISE SPECIFIED.
 2. ALL DIMENSIONS IN MM. AND LEVELS IN METERS.
 3. NO AND FLOOR PROTECTION TO BE PROVIDED ALL AROUND THE BUILDING.
 4. FINISHES SHALL BE DONE WITH PROPER JOINTS.
 5. FLOOR FINISH: HYDROXYDOL & BALCONY FLOOR FINISH: SHALL BE 10 MM DOWN FROM GENERAL FLOOR LEVEL.
 6. CURBS SHALL HAVE SLOPING OF 100 MM. HIGH.
 7. LOCUS ON SIZES & LEVELS OF FINISHES TO BE CO-ORDINATED WITH EXTERNAL SEWERAGE LAY OUT PLAN OF THE PROJECT BY LOCAL AUTHORITY.
 8. ALL MEASUREMENT MUST BE CHECKED AT SITE BY CONTRACTOR.

REVISIONS	DATE

DRAWN BY - AKIT
 DATE - 19-01-2018
 SCALE - NTS
 DRG. NO. -
 JOB. NO. - NIPFP/FLAT NO. 8/02
 CHECKED BY - SAMIR RASTOGI

TITLE
 NIPFP FLAT NO. 8
 (FLOORING LAYOUT PLAN)

CLIENT
 NATIONAL INSTITUTE OF PUBLIC
 FINANCE & POLICY

(Signature)