


LEGEND : (Air Conditioning)		
S. No.	SYMBOL	DESCRIPTION
1.		1.5 TR SPLIT AC
2.		1.0 TR SPLIT AC
3.		20 AMP AC POINT

NOTE :-
 1. DONOT SCALE THE DRAWING. FOLLOW WRITTEN DIMENSION ONLY.
 2. ALL DIMENSIONS IN MM. AND FEET IN PARENTHESES.
 3. 50 AMP FLUMP PROTECTION TO BE PROVIDED ALL AROUND THE BUILDING.
 4. DRIFTING SHALL BE DONE WITH PROPER PROTECTIVE COVERINGS.
 5. TOILET FAN/TYPE FITTING VENTILATOR & BALCONY FLOOR LEVEL SHALL BE 50 MM. DOWN FROM GENERAL FLOOR LEVEL.
 6. CONCRETE SHALL HAVE STRENGTH OF 80 MPA. M20.
 7. LOCUS ON SIZES & LEVELS OF FINISHES TO BE CO-ORDINATED WITH EXTERNAL SEWERAGE LAY OUT PLAN NOT A PART OF THIS DRAWING.
 8. ALL MEASUREMENT MUST BE CHECKED AT SITE BY CONTRACTOR.


REVISIONS	▼	DRAWN BY	DATE
		- AKIT	- 09-06-2018
		SCALE	- NTS
		DRG. NO.	-
		JOB. NO.	- NIPFP/FLAT NO. 8/03
		CHECKED BY	- SAMIR RASTOGI

TITLE
**NIPFP FLAT NO. 8
 (AIR-CONDITIONING LAYOUT)**

CLIENT
**NATIONAL INSTITUTE OF PUBLIC
 FINANCE & POLICY**

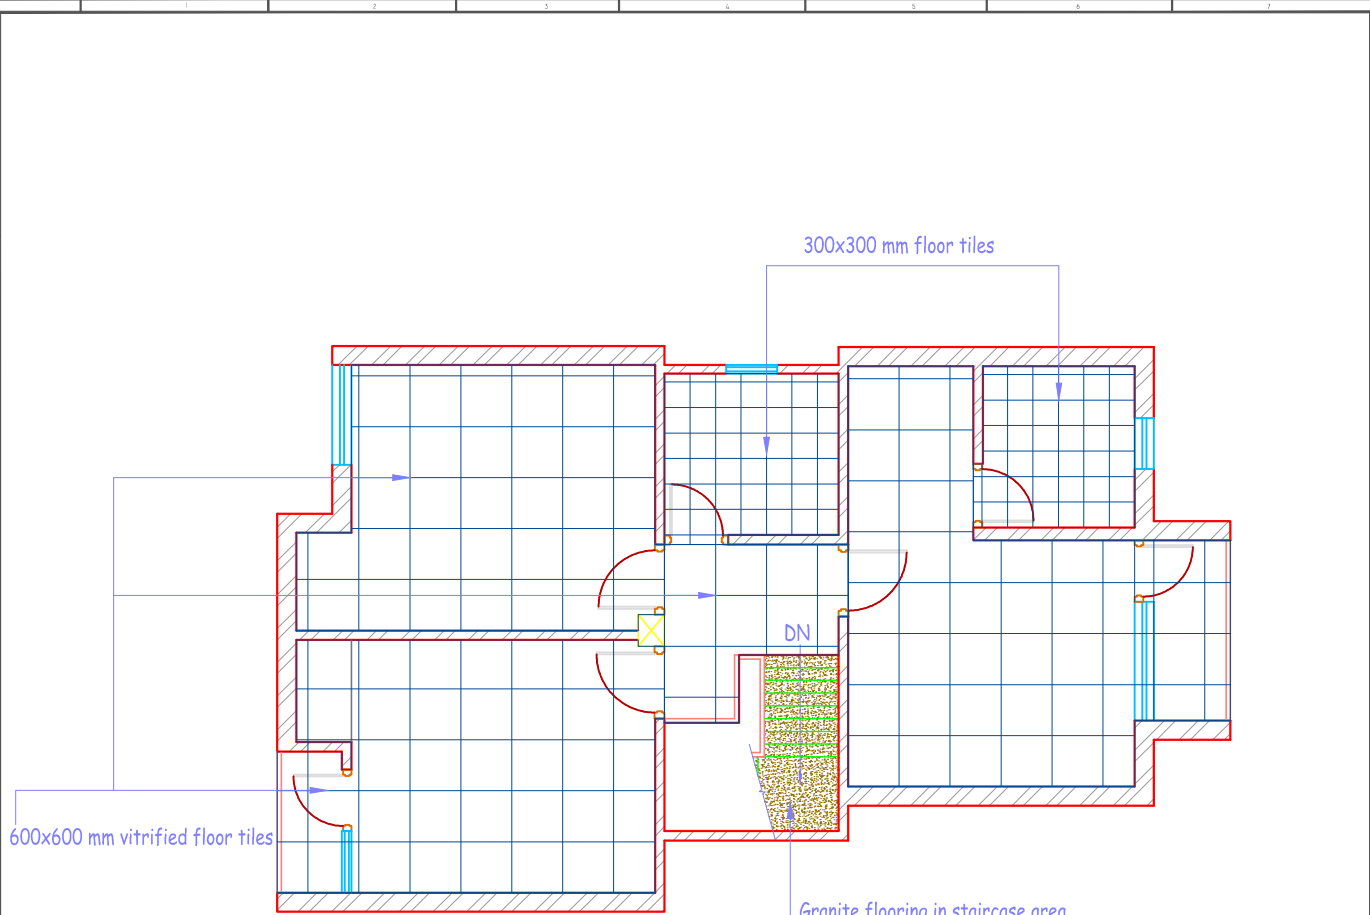

UPPER FLOOR PLAN

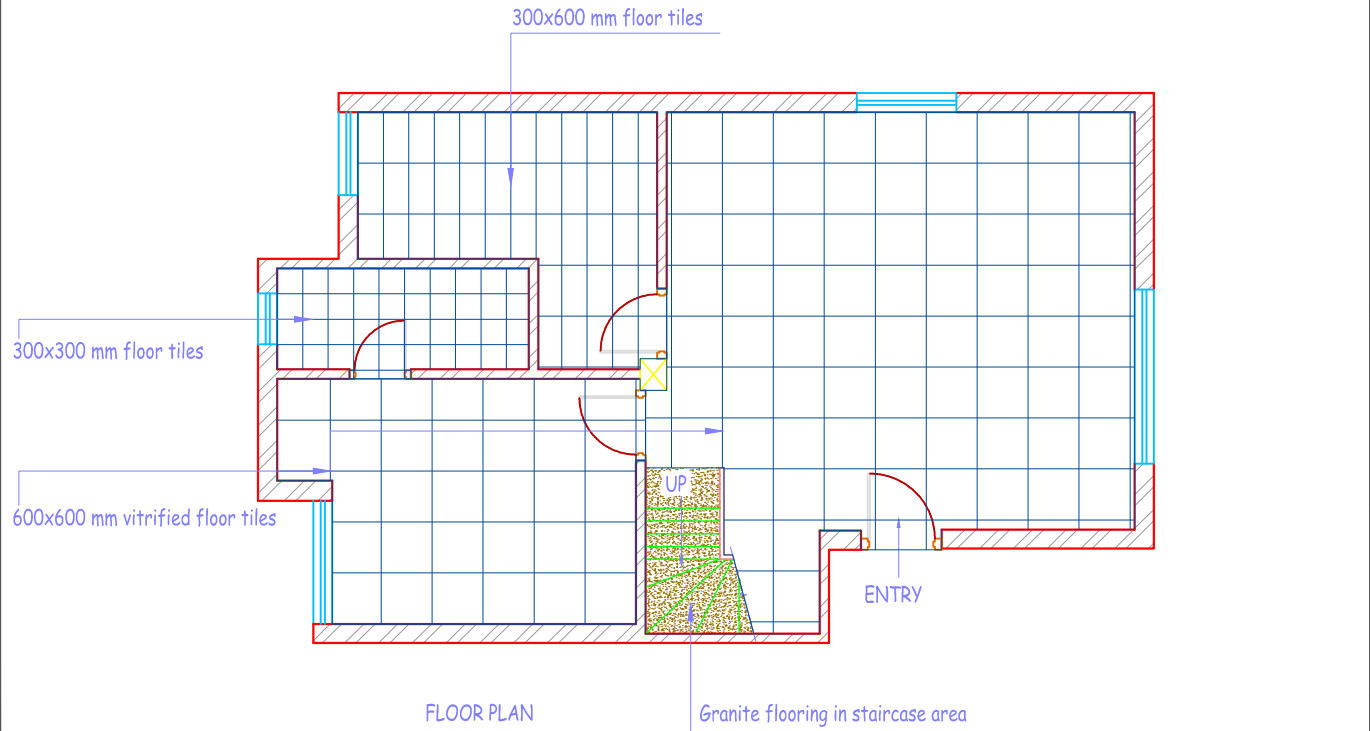

FLOOR PLAN

NOTE:-
 1. DIMENSIONS SHALL BE AS SHOWN IN THIS DRAWING ONLY.
 2. ALL DIMENSIONS IN MM AND UNLESS OTHERWISE SPECIFIED.
 3. NO AND FLOOR PROTECTION TO BE PROVIDED ALL AROUND THE BUILDING.
 4. FINISHES SHALL BE DONE WITH PROPER JOINTS.
 5. FLOOR FINISH: HYDROXYDOL & BALCONY FLOOR FINISH: SHALL BE 10 MM DOWN FROM GENERAL FLOOR LEVEL.
 6. CURBS SHALL HAVE SLOPING OF 100 MM. HIGH.
 7. LOCUS ON SIZES & LEVELS OF FINISHES TO BE CO-ORDINATED WITH EXTERNAL SEWERAGE LAY OUT PLAN OF THE PROJECT BY LOCAL AUTHORITY.
 8. ALL MEASUREMENT MUST BE CHECKED AT SITE BY CONTRACTOR.

REVISIONS	DATE

DRAWN BY - AKIT
 DATE - 19-01-2018
 SCALE - NTS
 DRG. NO. -
 JOB. NO. - NIPFP/FLAT NO. 8/02
 CHECKED BY - SAMIR RASTOGI

TITLE
 NIPFP FLAT NO. 8
 (FLOORING LAYOUT PLAN)

CLIENT
 NATIONAL INSTITUTE OF PUBLIC
 FINANCE & POLICY

(Signature)