
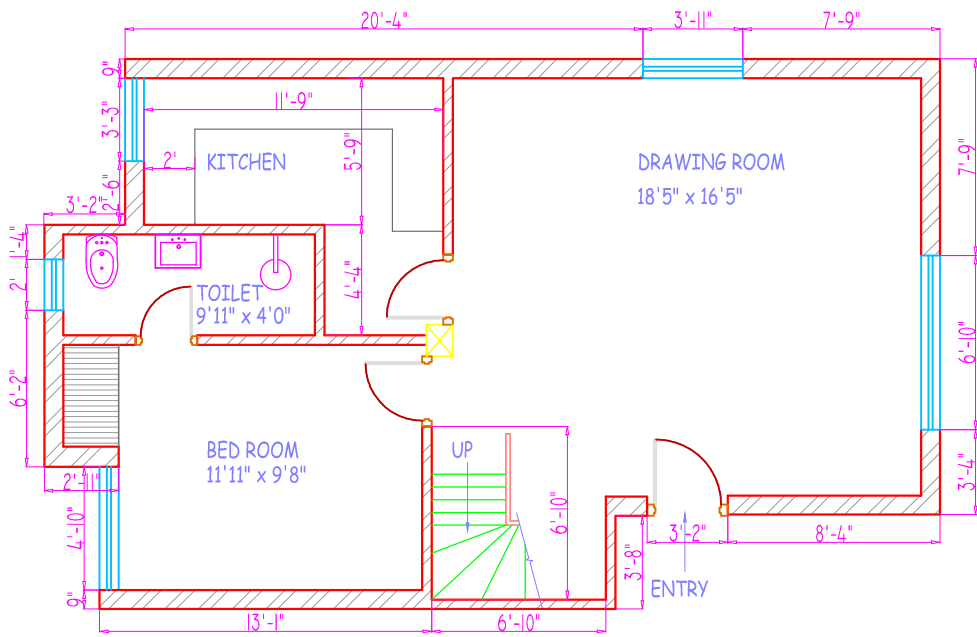


LEGEND : (Air Conditioning)		
S. No.	SYMBOL	DESCRIPTION
1.		1.5 TR SPLIT AC
2.		1.0 TR SPLIT AC
3.		20 AMP AC POINT

NOTE :-
 1. DONOT SCALE THE DRAWING. FOLLOW WRITTEN DIMENSION ONLY.
 2. ALL DIMENSIONS IN MM. AND FEET IN PARENTHESES.
 3. 50 AMP FLUPE PROTECTION TO BE PROVIDED ALL AROUND THE BUILDING.
 4. DRAWING SHALL BE DONE WITH PROPER TOOLS/LEVELS.
 5. TOILET FAN/IN-DOOR VENTILATOR & BALCONY FLOOR LEVEL SHALL BE 50 MM. DOWN FROM GENERAL FLOOR LEVEL.
 6. CURBSIDES SHALL HAVE SLOPING OF 80 PPM. MIN.
 7. LOCUS ON SIZES & LEVELS OF PROFILES TO BE CO-ORDINATED WITH EXTERNAL SEWERAGE LAY OUT PLAN FOR APPROVAL BY LOCAL AUTHORITY.
 8. ALL MEASUREMENT MUST BE CHECKED AT SITE BY CONTRACTOR.

REVISIONS	▼	DRAWN BY	DATE
		- AKIT	- 09-06-2018
		SCALE	- NTS
		DRG. NO.	-
		JOB. NO.	- NIPFP/FLAT NO. 8/03
		CHECKED BY	- SAMIR RASTOGI

TITLE	CLIENT
NIPFP FLAT NO. 8 (AIR-CONDITIONING LAYOUT)	NATIONAL INSTITUTE OF PUBLIC FINANCE & POLICY

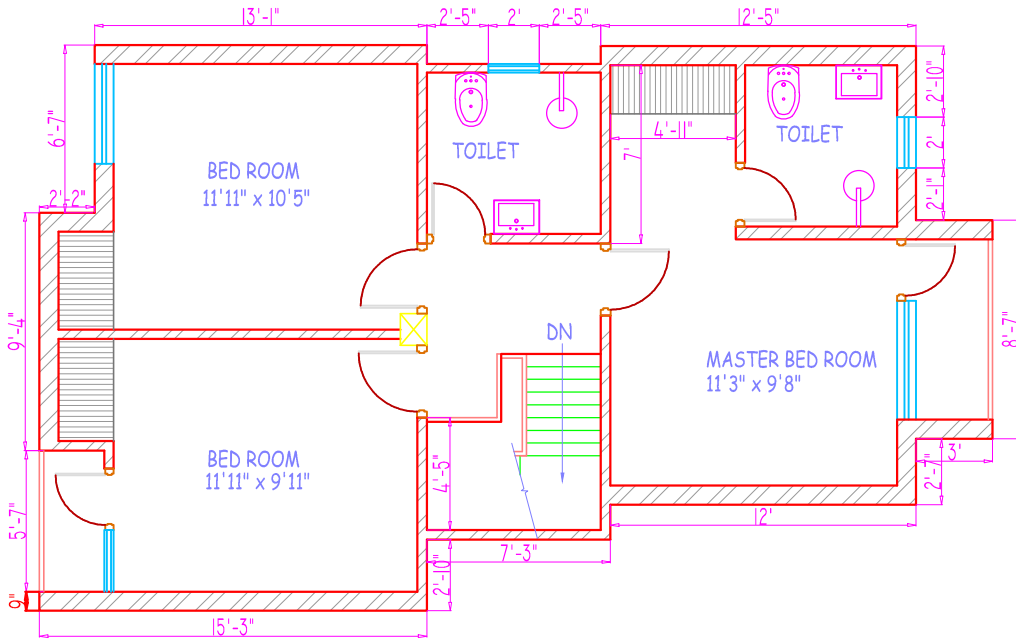

NOTE :-
 1. DO NOT SCALE THE DRAWING. FOLLOW WRITTEN DIMENSIONS ONLY.
 2. ALL DIMENSIONS IN MM. AND FEET IN PARENTHESES.
 3. SO AND PLUMP PROTECTION TO BE PROVIDED ALL AROUND THE BUILDING.
 4. FINISHING SHALL BE DONE WITH FINISHED FLOOR LEVEL.
 5. TOILET PARTS: FITTED VERSUS & BALCONY FLOOR LEVEL, SHALL BE 10 MM. DOWN FROM GENERAL FLOOR LEVEL.
 6. CURBS SHALL HAVE SLOPING OF 100 MM. HIGH.
 7. LOCUS ON SIZES & LEVELS OF FINISHES TO BE CO-ORDINATED WITH EXTERNAL SEWERAGE LAY OUT PLAN. GET APPROVED BY RAJAL ENGINEER.
 8. ALL MEASUREMENT MUST BE CHECKED BY SITE BY CONTRACTOR.


REVISIONS	DATE	BY

DRAWN BY :- AJKIT
DATE :- 09-06-2018
SCALE :- NTS
DRG. NO. :-
JOB. NO. :- NIPFP/FLAT NO. 8/01
CHECKED BY :- SAMIR RASTOGI


TITLE
 NIPFP FLAT NO. 8
 (EXISTING FLOOR PLAN)

CLIENT
 NATIONAL INSTITUTE OF PUBLIC
 FINANCE & POLICY

[Signature]

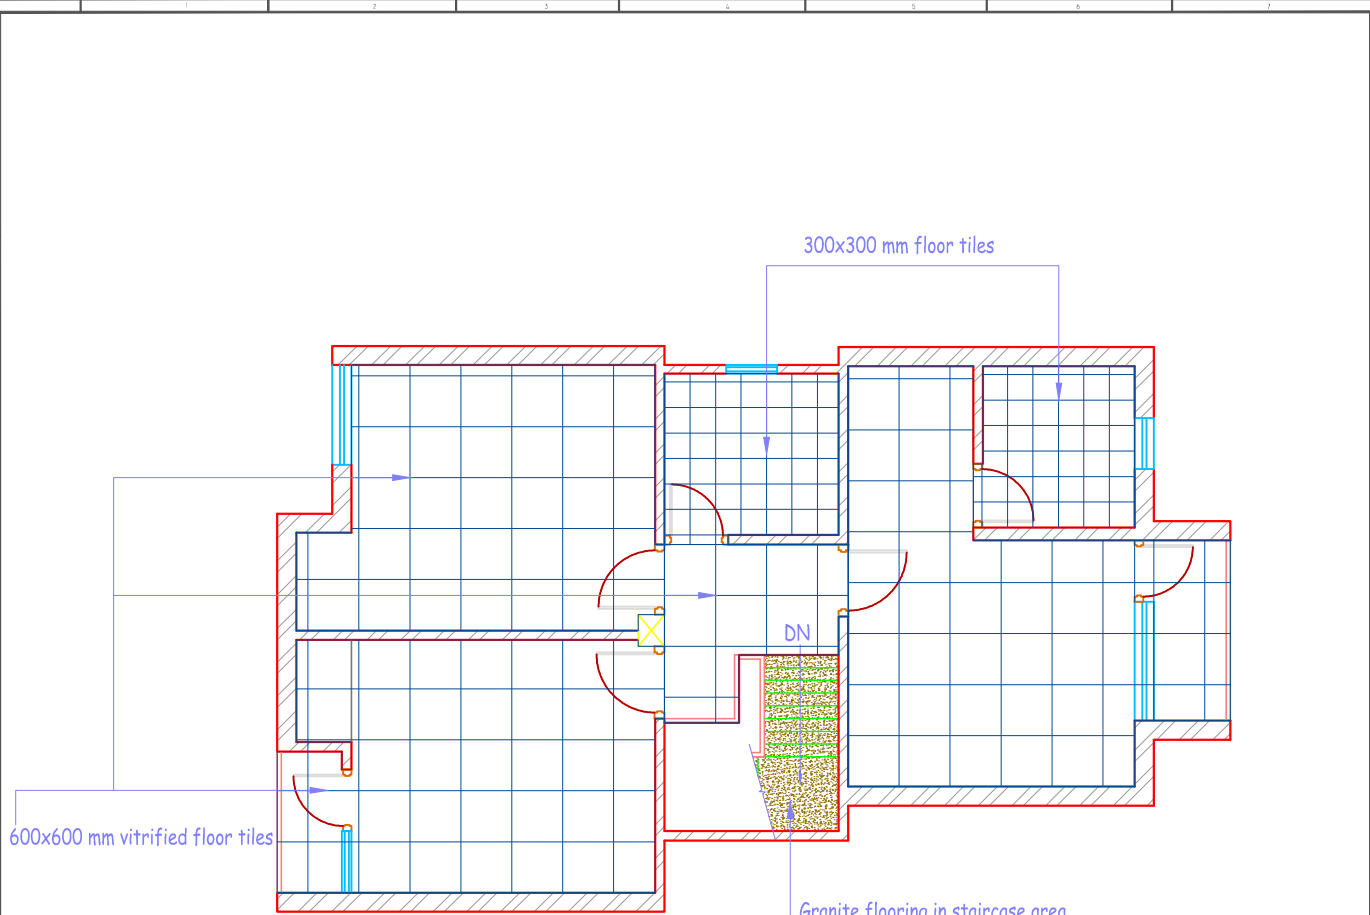

UPPER FLOOR PLAN

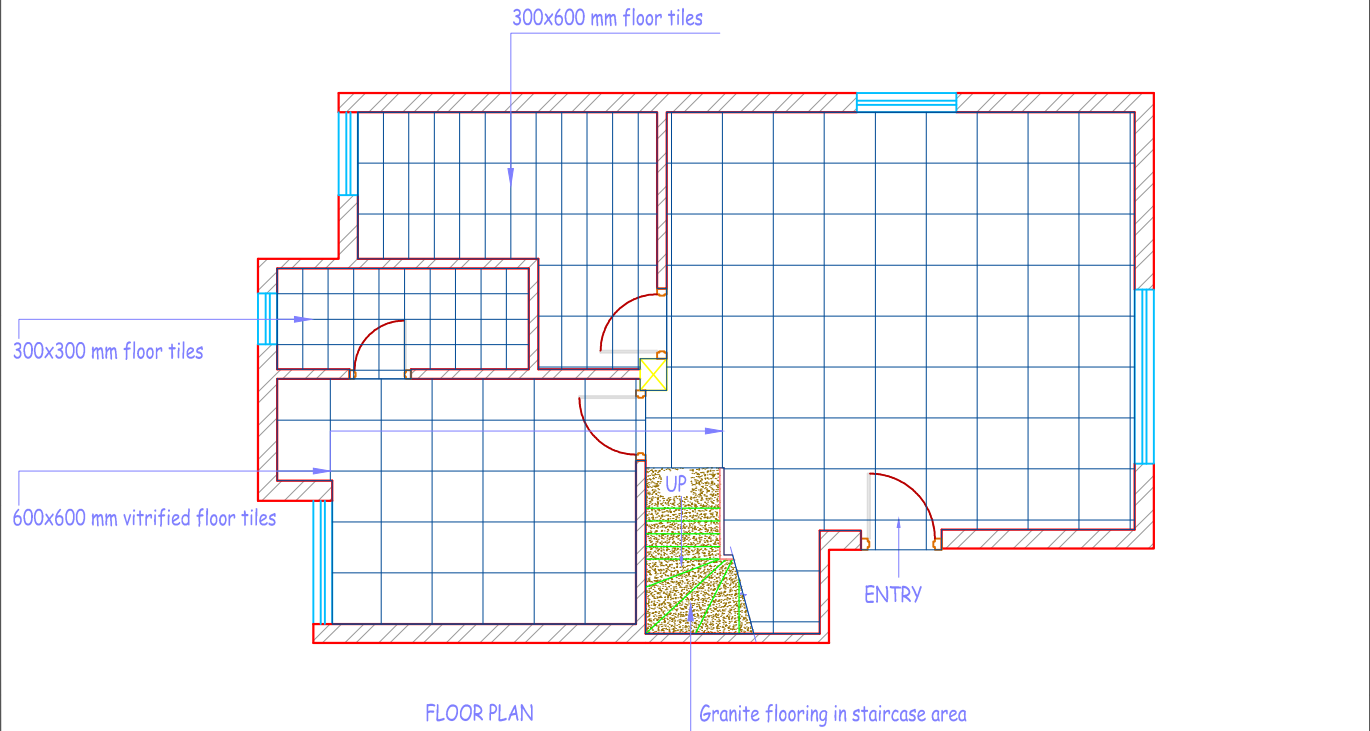

FLOOR PLAN

NOTE:-
 1. DIMENSIONS SHALL BE AS SHOWN UNLESS OTHERWISE SPECIFIED.
 2. ALL DIMENSIONS IN MM. AND LEVELS IN METERS.
 3. SO AND ANGLE FLASHING PROTECTION TO BE PROVIDED ALL AROUND THE BUILDING.
 4. FINISHES SHALL BE DONE WITH FINISHED FLOOR LEVEL.
 5. FLOOR FINISH: HYDROXYDUR & BALCONY FLOOR FINISH: SHALL BE 10 MM DOWN FROM GENERAL FLOOR LEVEL.
 6. CURBS SHALL HAVE SLOPING OF 100 MM. HIGH.
 7. LOCUS ON SIZES & LEVELS OF FINISHES TO BE CO-ORDINATED WITH EXTERNAL SEWERAGE LAY OUT PLAN OF THE PROJECT AT FINAL STAGE.
 8. ALL MEASUREMENT MUST BE CHECKED AT SITE BY CONTRACTOR.

REVISIONS	DATE

DRAWN BY - AKIT
 DATE - 19-01-2018
 SCALE - NTS
 DRG. NO. -
 JOB. NO. - NIPFP/FLAT NO. 8/02
 CHECKED BY - SAMIR RASTOGI

TITLE
 NIPFP FLAT NO. 8
 (FLOORING LAYOUT PLAN)

CLIENT
 NATIONAL INSTITUTE OF PUBLIC
 FINANCE & POLICY

(Signature)